





Besonderheiten

flexible Einsatzfähigkeit



WFP 128

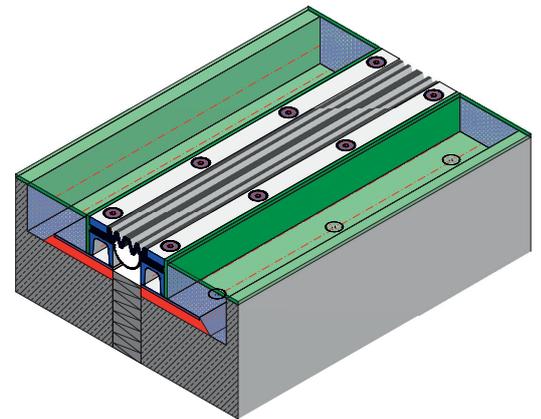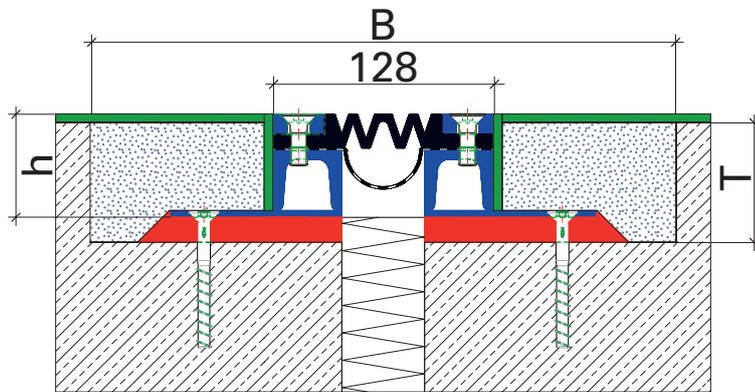

| | | | |
|-------------------|-------------------|-------------|--------------------|
| | | | |
| Dehnweg | Dehnweg | Fugenbreite | Belastung |
| 60 mm (±30 mm) | 30 mm (±15 mm) | 70 mm | B125 - D400 FL5 |

| Profil | Profilhöhe (h) | Aussparung (B) | Aussparung (T) |
|-------------|----------------|----------------|----------------|
| WFP 128-30 | 30 mm | 340 mm | 40 mm |
| WFP 128-35 | 35 mm | 340 mm | 45 mm |
| WFP 128-45 | 45 mm | 340 mm | 55 mm |
| WFP 128-60 | 60 mm | 340 mm | 70 mm |
| WFP 128-75 | 75 mm | 340 mm | 85 mm |
| WFP 128-90 | 90 mm | 420 mm | 100 mm |
| WFP 128-105 | 105 mm | 420 mm | 115 mm |
| WFP 128-120 | 120 mm | 420 mm | 130 mm |
| WFP 128-150 | 150 mm | 420 mm | 160 mm |

Allgemeine Informationen zum Produkt finden sie auf Seite 1

Technische Anpassungen vorbehalten